

STIEBEL ELTRON

Simply the Best

THREE SPEED HIGH PERFORMANCE CIRCULATING PUMPS

Non-submersible, for indoor use only.

FEATURES & ADVANTAGES

- Industry leading 3½ year warranty
- 3 Speed Motor Technology
- Removable Integrated Check Valve
- Class H Insulation
- Prevents thermal siphoning
- Eliminates more than 20 competitive models
- Quiet and low power consumption
- Built-in motor protection for longer life

APPLICATIONS

- Radiant Floor Heating
- Baseboard Heating
- Radiator Heating
- Fan-coil Heating
- Solar Heating
- Zoning



Model:CP3S15-62FC

Model:CP3S26-110FC

Model:CP3S26-110BFC

Pump Housing: Cast Iron

Pump Housing: Cast Iron

Pump Housing: Bronze

Voltage: 115 V, 60 HZ

Voltage: 115 V, 60 HZ

Voltage: 115 V, 60 HZ

Power: 100/70/55w

Power: 135/190/230w

Power: 135/190/230w

Motor: 2 Pole, Single Phase

Motor: 2 Pole, Single Phase

Motor: 2 Pole, Single Phase

Insulation Class: H 356° F (180° C)

Insulation Class: H 356° F (180° C)

Insulation Class: H 356° F (180° C)

Min Fluid Temp: 36° F (2° C)

Min Fluid Temp: 36° F (2° C)

Min Fluid Temp: 36° F (2° C)

Max Fluid Temp: 230° F (110° C)

Max Fluid Temp: 230° F (110° C)

Max Fluid Temp: 230° F (110° C)

Max Flow: 17.1 (U.S. GPM)

Max Flow: 40.2 (U.S. GPM)

Max Flow: 40.2 (U.S. GPM)

Max Head: 19.2 ft (head)

Max Head: 33.1 ft (head)

Max Head: 33.1 ft (head)

Max Working Pressure: 145 PSI




Max Working Pressure: 145 PSI

Max Working Pressure: 145 PSI

Capacitance: 10 µf


Capacitance: 20 µf

Capacitance: 20 µf






Model: CP3S15-62FC

MODEL	SPEED	TACO	BELL & GOSSET	ARMSTRONG	GRUNDFOS
CP3S15-62FC (STIEBEL ELTRON)	HIGH	005F, 007F, 008F, 0010F-IFC, 00R-MSF1-IFC	NRF-22, LR-20WR	Astro 30, Astro 50-3	UPS15-58FC
	MED	005F-(IFC), 007F-(IFC), 008F-(IFC), 0010F-IFC, 00R-IFC, 00R-MSF1-IFC	NRF9F/LW	Astro 25, Astro 30-3	UPS15-58FC
	LOW	005F-(IFC), 006F-(IFC), 00R-MSF1-IFC	--	Astro 20	UPS15-58FC

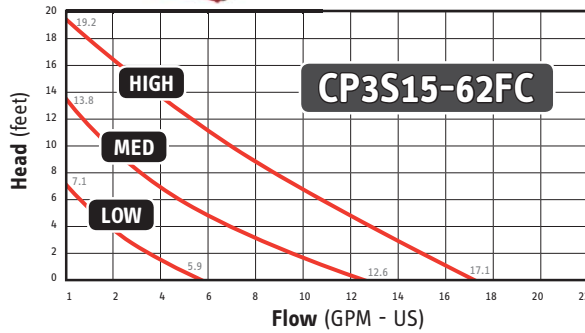


CP3S15-62FC	VOLTS	WATTS	AMPS	HP	CAPACITOR	INSULATION CLASS
3 Speed	115 v	190	0.9	1/25	10mf/180V	H (356° F, 180° C)
2 Speed	115 v	135	0.7	1/25	10mf/180V	H (356° F, 180° C)
1 Speed	115 v	100	0.5	1/25	10mf/180V	H (356° F, 180° C)






Model: CP3S26-110FC

MODEL	SPEED	TACO	BELL & GOSSET	ARMSTRONG	GRUNDFOS
CP3S26-110FC (STIEBEL ELTRON)	HIGH	0013-IFC	NRF-36 Sp-2, NRF-45 Sp-2	E7	UPS26-99FC
	MED	0011F-IFC, 0014F-IFC	Series 100, PL-30, PR, NRF-36 Sp-1, NRF-45 Sp-1	Astro 50, H41	UPS26-99FC
	LOW	--	LR-15BWR	Astro 30	UPS26-99FC

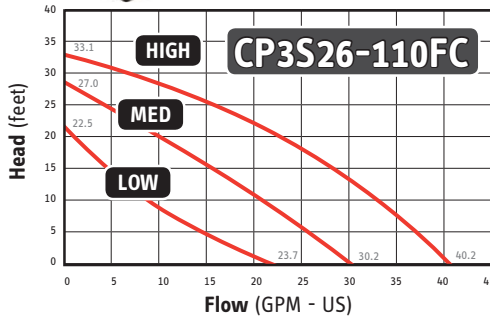


CP3S26-110FC	VOLTS	WATTS	AMPS	HP	CAPACITOR	INSULATION CLASS
3 Speed	115 v	230	2.0	1/6	20mf/180V	H (356° F, 180° C)
2 Speed	115 v	190	1.7	1/6	20mf/180V	H (356° F, 180° C)
1 Speed	115 v	135	1.2	1/6	20mf/180V	H (356° F, 180° C)



Model: CP3S26-110BFC (Bronze - Open Loop)

MODEL	SPEED	TACO	BELL & GOSSET	ARMSTRONG	GRUNDFOS
CP3S26-110BFC (STIEBEL ELTRON)	HIGH	0013B-IFC	NRF-36 Sp-2, NRF-45 Sp-2	E7B	UPS26-99BFC
	MED	0011B-IFC, 0014B-IFC	Series 100, PL-30, PR, NRF-36 Sp-1, NRF-45 Sp-1	Astro 50B, H41	UPS26-99BFC
	LOW	--	LR-15BWR	Astro 30B	UPS26-99BFC

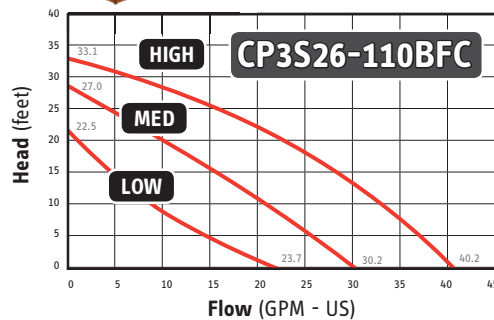

CP3S26-110BFC	VOLTS	WATTS	AMPS	HP	CAPACITOR	INSULATION CLASS
3 Speed	115 v	230	2.0	1/6	20mf/180V	H (356° F, 180° C)
2 Speed	115 v	190	1.7	1/6	20mf/180V	H (356° F, 180° C)
1 Speed	115 v	135	1.2	1/6	20mf/180V	H (356° F, 180° C)